

### Visit Our Web Site at www.usindustrial.com

# ONE (1) NEW U.S. INDUSTRIAL 20" X 80" PRECISION GEARED HEAD ENGINE LATHE MODEL USL2080 Spindle bore will pass 4"

This precision, heavy duty geared head engine lathe incorporates hardened and precision ground bedways on longitudinal and cross ways, and wide, precision ground gears. It has a gap-bed design, feed-rod/lead screw safety interlock system, weight bearing tailstock and forward/reverse levers at both the aprons and the head stock.

As with all U.S. Industrial lathes, it comes with a plethora of standard accessories, 3 and 4-jaw chucks, follower and steady rests, 4-way rapid travel, work lamp, a coolant system and an operator/service manual.

#### Standard Equipment: (Items below are INCLUDED with the machine)

- 12" 3-Jaw Chuck. Universal, Self-centering
- 16" 4-Jaw Independent Chuck
- Steady Rest
- 4-Way Toolpost
- Thread Dial
- Work Lamp
- Flood Coolant System
- Sino 2-Axis Digital Readout inch/metric (installed)
- Inch Reading Dials on Apron, Cross-Slide and Compound
- · Manual with test certificate

- 25" Face Plate & Dog Plate
- · Foot Brake with microswitch
- Follow Rest
- 4-Way Rapid Travel
- · Safety Chuck Shield
- Taper Attachment (installed)
- · Large Spindle Bore to pass 4"
- Full Length Backsplash
- Slide Out Chip Pans



# U.S. INDUSTRIAL MACHINERY

P.O. BOX 2098 MEMPHIS, TN 38101 PHONE: (800) 860-1850 FAX: (901) 526-2339 **Visit Our Web Site at www.usindustrial.com** 

#### **Specifications and important information:**

Swing Over Bed

Swing Over Cross-Slide 19.7" (500mm) Swing Over Gap 11.8" (300mm) 28" (710mm) Gap Length 9.44" (240mm) Maximum Workpiece Length with 3-jaw 78.74" (2000mm) chuck 76.77" (1950mm) Maximum Turning Length Spindle Bore 4.134" (105mm) Spindle Type D1-8 Camlock

Spindle Type D1-8 Camlock
12 Spindle Speeds 36 to 1600 RPM
65 Longitudinal Feeds .0023 to .0937 IPR
65 Cross Feeds .0011 to .0404 IPR
22 Metric Threads 1 to 14mm

27 Inch Threads2 to 28 TPI18 Module Threads0.5 to 7mm24 Diametral Pitch Threads4 to 56 DPCompound Rest Travel5.75"Cross-Slide Travel12.125"

Tailstock Taper

Tailstock Spindle Travel

Tailstock Spindle Diameter

No. 5 Morse Taper
5.906" (150mm)
2.953" (75mm)

Main Motor HP 10 HP (7 kw) 220V or 440V, 3-Phase

Rapid Feed Motor 0.4 HP

Coolant Pump Motor .16 HP, 11 gallons per minute

Lathe Gross Weight 6,500 lbs.

Dimensions 147" long, 40" wide, 50" tall

PRICE.......With digital readout and taper attachment.....F.O.B. MEMPHIS............\$ 34,990.00 Order Model Number: USL2080

#### **AVAILABLE OPTIONS:**

We await your reply and thank you for this opportunity to quote.

Sincerely,

U.S. INDUSTRIAL MACHINERY

# **U.S. INDUSTRIAL MACHINERY**

P.O. BOX 2098 MEMPHIS, TN 38101 PHONE: (800) 860-1850 FAX: (901) 526-2339

Visit Our Web Site at <a href="www.usindustrial.com">www.usindustrial.com</a>




**Detail of Headstock** 



**Standard Accessories** 

Also includes steady rest, follow rest, 3-jaw chuck, and 2-axis DRO See pic on Page 1.

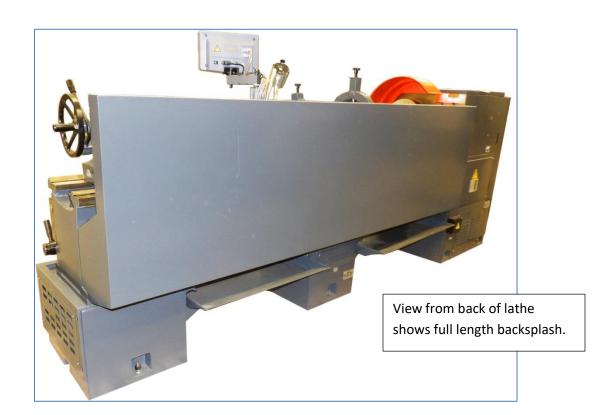

## QUICK CHANGE TOOLPOST OPTION - (Replaces standard four-way toolpost


Thank you for the opportunity to quote. We are pleased to offer the following equipment for your consideration:

# ONE – NEW QUICK CHANGE TOOLPOST WITH FIVE HOLDERS, FOR FACTORY ONLY INSTALL ON USL SERIES 20 and 26 LATHES

This is custom installation AND not available after machine ships. Must be installed on lathe at time of order, prior to shipping.

Extra holders are \$75.00 each.



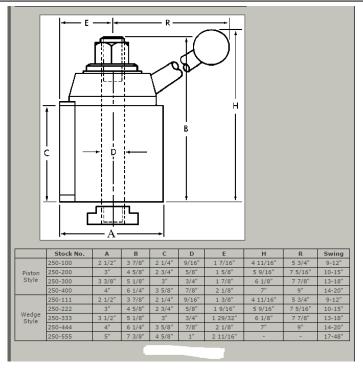

## **Cutting Tool Package for U.S. Industrial Lathes:**

This optional cutting tool package is designed to fit our QUICK CHANGE TOOLPOST option. It is not for the standard 4-way toolpost.

### Tools included below are for:

<ul> <li>Rough and medium finishing of the part OD.</li> <li>Left- and right-hand tools for working left and right hand shoulders</li> </ul>	Fine finish of the part ID
<ul> <li>Tools for threading OD and ID</li> <li>Part off tools</li> </ul>	Tools for boring the ID and more
<u>List of carbide cutting tools in KIT for US INDUSTRIAL LATHE: (ISO tools are imports.)</u> Note: Tools for 20" and 26" Lathes will be 1" square shank  Note: Customer MUST purchase option, OUR QC Toolpost set for install prior to shipping:	
<ol> <li>MWLN-R, 1" square, triangle insert, right hand</li> <li>MWLN-L, 1" square, triangle insert, left hand</li> <li>Box of 10 WNMG inserts for above</li> </ol>	
4. MCLN-R, 1" square, diamond insert, right hand	
7. MVJN-R, 1" square, diamond insert, fine finish, right hand 8. MVJN-L, 1" square, diamond insert, fine finish, left hand 9. Box of 10 VNMG inserts, 1/64" nose radius	
10. SER-1000-SET, 1" square, for threading OD, with inserts (This is a KIT and includes threading inserts.)	
11. SIR-1000-SET, 1" round, for threading ID, with inserts	
12. SCLCR-SET, Boring bars, .315", $3/8$ ", $1/2$ ", $5/8$ ", $3/4$ " bars, with i (This is a KIT and includes inserts.)	nserts
13. RH-MCLN, Boring bar, ¾ or 1" diameter, 12" long 14. Use inserts in Item No. 6, CNMG	
15. HSS Blade for part-off holder, high speed steelBlock, blade and 10 self-lock carbide parting/grooving inserts	
16. Arbor and key chuck for tailstock	
Set priceto fit 1" square shank 444 size quick change toolpost kit,\$ 3,495.00	