

#### Visit Our Web Site at www.usindustrial.com

# ONE (1) NEW U.S. INDUSTRIAL 26" X 120" PRECISION GEARED HEAD ENGINE LATHE MODEL USL26120 Spindle bore will pass 4"

This precision, **heavy duty geared head engine lathe** incorporates hardened and precision ground bedways on longitudinal and cross ways, and wide, precision ground gears. It has a gap-bed design, feed-rod/lead screw safety interlock system, weight bearing tailstock and forward/reverse levers at both the aprons and the head stock.

As with all U.S. Industrial lathes, it comes with a plethora of standard accessories, 3 and 4-jaw chucks, follower and steady rests, 4-way rapid travel, work lamp, a coolant system and an operator/service manual.

#### Standard Equipment: (Items below are INCLUDED with the machine)


- 12" 3-jaw chuck. Universal, self-centering with an American standard tongue and groove top Jaws.
- 16" 4-jaw independent chuck
- · Steady rest
- 4-way toolpost
- Thread Dial
- Work lamp
- · Flood coolant system
- Sino 2-axis digital readout inch/metric

#### (installed)

 Inch reading dials on Apron, Cross-Slide and compound Foot brake with microswitch and brake

• 25" Face Plate & Dog Plate

- Follow rest
- 4-way rapid travel
- · Safety chuck shield
- Taper attachment (installed)
- Large spindle bore to pass 4"
- Traveling Backsplash Behind Apron
- · Slide out chip pans

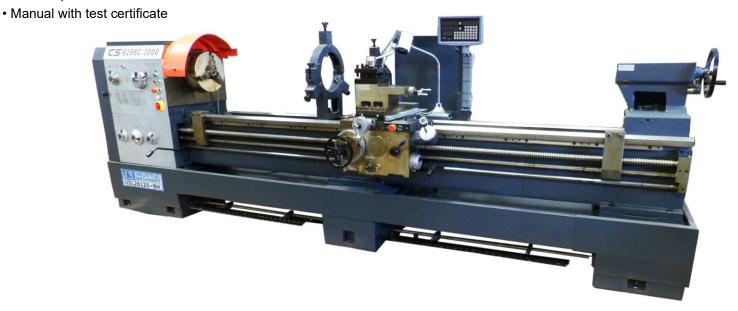

## U.S. INDUSTRIAL MACHINERY

P.O. BOX 2098 MEMPHIS, TN 38101 PHONE: (800) 860-1850 FAX: (901) 526-2339 **Visit Our Web Site at www.usindustrial.com** 

### Specifications and important information:

Swing Over Bed 26" (660mm) Swing Over Cross-Slide 16.53" (420mm) Swing Over Gap 34.25" (870mm) Gap Length 9.44" (240mm) Maximum Workpiece Length with 3-jaw chuck 118" (3000mm) Maximum Turning Length 116" (2950mm) Spindle Bore 4.134" (105mm) Spindle Type D1-8 Camlock 36 to 1600 RPM 12 Spindle Speeds 65 Longitudinal Feeds .0023 to .0937 IPR 65 Cross Feeds .0011 to .0404 IPR

22 Metric Threads1 to 14mm27 Inch Threads2 to 28 TPI18 Module Threads0.5 to 7mm24 Diametral Pitch Threads4 to 56 DPCompound Rest Travel5.75"Cross-Slide Travel12.125"

Tailstock Taper
No. 5 Morse Taper
Tailstock Spindle Travel
5.906" (150mm)
Tailstock Spindle Diameter
2.953" (75mm)

Main Motor HP 10 HP (7 kw) 220V or 440V, 3-Phase

Rapid Feed Motor 0.4 HP

Coolant Pump Motor .16 HP, 11 gallons per minute

Lathe Gross Weight 8,500 lbs.

Dimensions 183" long, 40" wide, 55" tall

PRICE.......With digital readout and taper attachment.....F.O.B. MEMPHIS............\$ 44,990.00 (Order Model Number: USL26X120BH-KIT)

#### **AVAILABLE OPTIONS:**

We await your reply and thank you for this opportunity to quote.

Sincerely,

U.S. Industrial Machinery

October 2022

# **U.S. INDUSTRIAL MACHINERY**

P.O. BOX 2098 PHONE: (800) 860-1850 MEMPHIS, TN 38101 FAX: (901) 526-2339

Visit Our Web Site at www.usindustrial.com

**Detail of Headstock** 





Also includes steady rest, follow rest, 3-jaw chuck, and 2-axis DRO See pic on Page 1.

Apron with travelling digital readout display, follow rest, steady rest, taper attachment, rapid travels.





View from back of lathe shows travelling backsplash.

### QUICK CHANGE TOOLPOST OPTION – (Replaces standard four-way toolpost)

Thank you for the opportunity to quote. We are pleased to offer the following equipment for your consideration:

# ONE – NEW QUICK CHANGE TOOLPOST WITH FIVE HOLDERS, FOR FACTORY ONLY INSTALL ON USL SERIES LATHES


Wedge style Kit, #444 for our Lathes for 1" Square tools. This comes with Part off holder, knurling holder, boring bar holder, and two 1" SS holders

(This ships only installed on lathe.)

This is custom installation AND not available after machine ships. Must be installed on lathe at time of order, prior to shipping.

Extra holders are \$75.00 each.



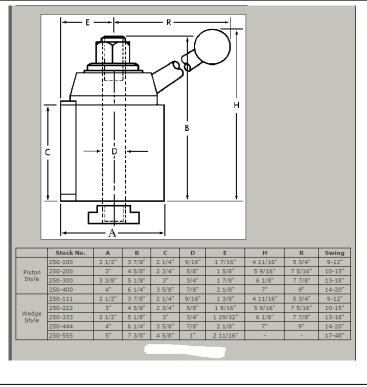

## **Cutting Tool Package for U.S. Industrial Lathes:**

This optional cutting tool package is designed to fit our QUICK CHANGE TOOLPOST option. It is not for the standard 4-way toolpost.

### Tools included below are for:

<ul> <li>Rough and medium finishing of the part OD.</li> <li>Left- and right-hand tools for working left and right hand shoulders</li> </ul>	Fine finish of the part ID
<ul> <li>Tools for threading OD and ID</li> <li>Part off tools</li> </ul>	Tools for boring the ID And more
List of carbide cutting tools in KIT for US INDUSTRIAL LATHE: (IS Note: Tools for 20" and 26" Lathes will be 1" square shank Note: Customer MUST purchase option, OUR QC Toolpost set fo	· · · ·
<ul> <li>MWLN-R, 1" square, triangle insert, right hand</li> <li>MWLN-L, 1" square, triangle insert, left hand</li> <li>Box of 10 WNMG inserts for above</li> </ul>	
4 MCLN-R, 1" square, diamond insert, right hand	
7 MVJN-R, 1" square, diamond insert, fine finish, right hand 8 MVJN-L, 1" square, diamond insert, fine finish, left hand 9 Box of 10 VNMG inserts, 1/64" nose radius	
10 . SER-1000-SET, 1" square, for threading OD, with inserts (This is a KIT and includes threading inserts.)	
11. SIR-1000-SET, 1" round, for threading ID, with inserts (This is a KIT and includes threading inserts.)	
12. SCLCR-SET, Boring bars, .315", $3/8$ ", $1/2$ ", $5/8$ ", $3/4$ " bars, with in (This is a KIT and includes inserts.)	nserts
13. RH-MCLN, Boring bar, 1" diameter, 12" long	
15. HSS Blade for part-off holder, high speed steel	
16. Arbor and key chuck for tailstock	
Set price…to fit 1" square shank 444 size quick change toolpo	ost kit\$ 3,495.0